




LIGHT



BULB LIGHT

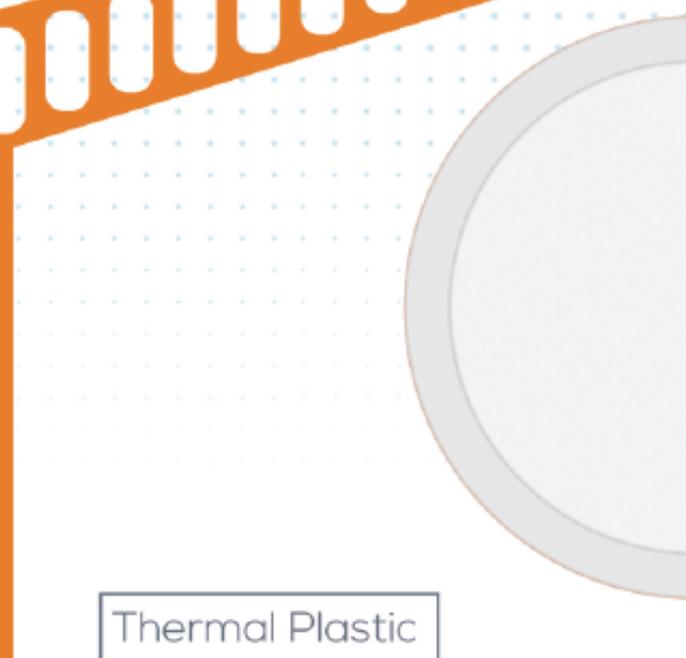

Thermal Plastic

PANEL LIGHT



## ABOUT US

Our Company CEO, Norman Tse, found Homi lighting in 2007, choosing Shenzhen as a destination to build manufacturing center and marketing office. Homi is offering middle quality lights at very competitive price. Our main products are led mini panel, led flood light, T-lamp, led bulb and spotlight. They are exported to more than 70 countries, around 50% to Europe, 20% to south America, 15% to southeast Asia, and 15% to the rest of the world. We have achieved sales turnover of 20 million USD in 2015 and targets 25 million USD for 2016. Homi has over 15,000 sqm production area and 400 workers. We have 2 automatic aging lines, 3 automatic production

lines, 25 sets automatic glue machines, 5 sets Panasonic high-speed SMT machines, 3 sets overflow machines, 1 standard dark room for IES testing, 3 sets blister package machines.

We passed ISO9001:2008, ISO14001. Our material pass rate is greater than or equal to 95%, finished products pass rate 98%. Our products passed TUV CE/ROHS, UL/DLC/Energy Star. Factory passed BSCI audits of OBI, TISI of Thailand government, NCC of Argentina government.

We Homi, sincerely invite you to be our distributors, wholesalers. We join hands to witness the bright future of LED lighting.

# FACTORY VISITING

1

Found in 2007, Homi has about 400 employees, covering over 15,000sqm production area, including 200 sqm showroom and meeting rooms. In 2016, Homi equipped 3 automatic production lines for bulb and spot light and 2 sets automatic aging machines.





# CERTIFICATES



# PRODUCT SERIES

3



**PANEL LIGHT**  
05~10



**FLOOD LIGHT**  
11~16



**T- LIGHT**  
17~20



**TP BULB LIGHT**  
21~26



**G BULB LIGHT**  
27



**DC BULB LIGHT**  
28



**SPOTLIGHT**  
29~31



**MODULE SPOT**  
32



**AR111**  
33~36



**PAR LIGHT**  
37~38



**CEILING LIGHT**  
39~40



**DOWN LIGHT**  
41~44



**US PART**  
45~50

# SUPER SLIM MINI PANEL LIGHT

## Features

Super slim thermal plastic round panel-13mm

Available in different color

5'7'9'12'

Built-in driver

CE/UL qualified


2x



13mm

14.6mm




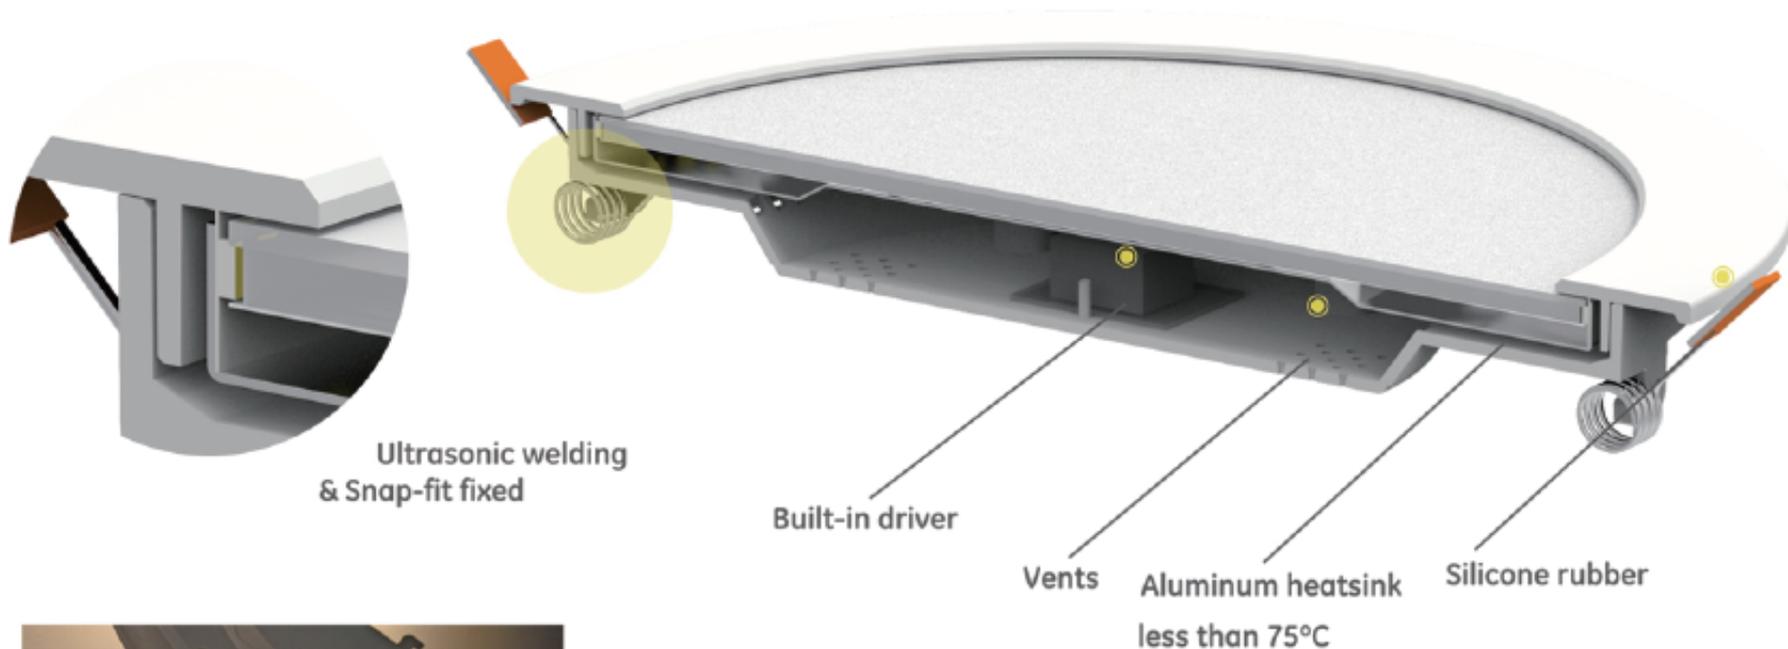

**No Light Leakage**  
**Ultrasonic Welding Screwless**

### Built-in Driver

This LED panel was designed without screws, with built-in driver and snap-fit fixing, which impresses you with seamless and sophisticated appearance. Additionally, it's easy to install and disassemble.



① The horn applies pressure to the plastic materials



② The horn vibrates vertically at 20,000 to 40,000 times per second.



③ The vibrations create frictional heat that causes the materials to melt and flow together.

## LED Panel Light

LED min panel lights can replace GRILL light and tube light. They are super slim designed and belong to one of the most elegant led light, widely used in hotels, offices, shopping malls, schools, hospitals, museums, art galleries, kitchens, living room, bedroom, etc.



## Super Slim Mini Panel Light



### Features:

Super slim thermal plastic round panel-13mm

Available in different color

5'/7'/9'/12'

Built-in driver

CE/UL qualified

IP 65



13mm



| MODEL                 | POWER | LED TYPE | LUMENS | VOLTAGE               | DIMENSION |
|-----------------------|-------|----------|--------|-----------------------|-----------|
| PR135M-PL023CKF-6W80  | 6W    | SMD      | 360lm  | AC200-240V/AC100-130V | Φ135x13mm |
| PR180M-PL023CKF-12W80 | 12W   | SMD      | 780lm  | AC200-240V/AC100-130V | Φ180x13mm |
| PR225M-PL023CKF-18W80 | 18W   | SMD      | 1170lm | AC200-240V/AC100-130V | Φ225x13mm |
| PR300M-PL023CKF-24W80 | 24W   | SMD      | 1560lm | AC200-240V/AC100-130V | Φ300x13mm |

## Plastic Min Panel Light



| MODEL                     | POWER | LUMENS | DIMENSION |
|---------------------------|-------|--------|-----------|
| PS120A-PL012FBW-6W80-230  | 6W    | 480lm  | 107x107mm |
| PS168A-PL012FBW-12W80-230 | 12W   | 960lm  | 156x156mm |
| PS225A-PL012FBW-18W80-230 | 18W   | 1440lm | 207x207mm |
| PS300A-PL012FBW-24W80-230 | 24W   | 1920lm | 279x279mm |



| MODEL                     | POWER | LUMENS | DIMENSION |
|---------------------------|-------|--------|-----------|
| PR120A-PL012FBW-6W80-230  | 6W    | 480lm  | Φ120mm    |
| PR168A-PL012FBW-12W80-230 | 12W   | 960lm  | Φ168mm    |
| PR225A-PL012FBW-18W80-230 | 18W   | 1440lm | Φ225mm    |
| PR300A-PL012FBW-24W80-230 | 24W   | 1920lm | Φ298mm    |



| MODEL                     | POWER | LUMENS | DIMENSION    |
|---------------------------|-------|--------|--------------|
| PS120M-PL012FBW-6W80-230  | 6W    | 480lm  | 120x120x30mm |
| PS168M-PL012FBW-12W80-230 | 12W   | 960lm  | 168x168x30mm |
| PS225M-PL012FBW-18W80-230 | 18W   | 1440lm | 225x225x30mm |
| PS300M-PL012FBW-24W80-230 | 24W   | 1920lm | 298x298x30mm |



| MODEL                     | POWER | LUMENS | DIMENSION |
|---------------------------|-------|--------|-----------|
| PR120M-PL012FBW-6W80-230  | 6W    | 480lm  | Φ120x30mm |
| PR168M-PL012FBW-12W80-230 | 12W   | 960lm  | Φ168x30mm |
| PR225M-PL012FBW-18W80-230 | 18W   | 1440lm | Φ225x30mm |
| PR300M-PL012FBW-24W80-230 | 24W   | 1920lm | Φ298x30mm |

## Aluminum Min Panel Light



| MODEL                   | POWER | LUMENS | DIMENSION    |
|-------------------------|-------|--------|--------------|
| PS85A-DC01CBW-3W90-WV   | 3W    | 240lm  | 85x85x11mm   |
| PS120A-DC01CBW-6W90-WV  | 6W    | 480lm  | 120x120x11mm |
| PS150A-DC01CBF-9W90-WV  | 9W    | 720lm  | 150x150x11mm |
| PS172A-DC01CBF-12W90-WV | 12W   | 960lm  | 172x172x11mm |
| PR200A-DC01CBF-15W90-WV | 15W   | 1200lm | 193x193x11mm |
| PS193A-DC01CBF-18W90-WV | 18W   | 1440lm | 225x225x11mm |
| PS300A-DC01CBF-24W90-WV | 24W   | 1920lm | 300x300x11mm |



| MODEL                   | POWER | LUMENS | DIMENSION    |
|-------------------------|-------|--------|--------------|
| PS120M-DC01CBW-6W90-WV  | 6W    | 480lm  | 120x120X36mm |
| PS172M-DC01CBF-12W90-WV | 12W   | 960lm  | 172x172X36mm |
| PR215M-DC01CBF-18W90-WV | 18W   | 1440lm | 215x215X36mm |
| PR300M-DC01CBF-24W90-WV | 24W   | 1920lm | 300x300X36mm |




| MODEL                   | POWER | LUMENS | DIMENSION |
|-------------------------|-------|--------|-----------|
| PR85A-DC01CBW-3W90-WV   | 3W    | 240lm  | Φ85x11mm  |
| PR120A-DC01CBW-6W90-WV  | 6W    | 480lm  | Φ120x11mm |
| PR148A-DC01CBF-9W90-WV  | 9W    | 720lm  | Φ148x11mm |
| PR168A-DC01CBF-12W90-WV | 12W   | 960lm  | Φ168x11mm |
| PR200A-DC01CBF-15W90-WV | 15W   | 1200lm | Φ200x11mm |
| PR225A-DC01CBF-18W90-WV | 18W   | 1400lm | Φ225x11mm |
| PR300A-DC01CBF-24W90-WV | 24W   | 1920lm | Φ300x11mm |



| MODEL                   | POWER | LUMENS | DIMENSION |
|-------------------------|-------|--------|-----------|
| PR120A-DC01CBW-6W90-WV  | 6W    | 480lm  | Φ120x36mm |
| PR168A-DC01CBF-12W90-WV | 12W   | 960lm  | Φ168x36mm |
| PR225A-DC01CBF-18W90-WV | 18W   | 1440lm | Φ225x36mm |
| PR300A-DC01CBF-24W90-WV | 24W   | 1920lm | Φ300x36mm |

# PRIVATE MODEL FLOODLIGHT

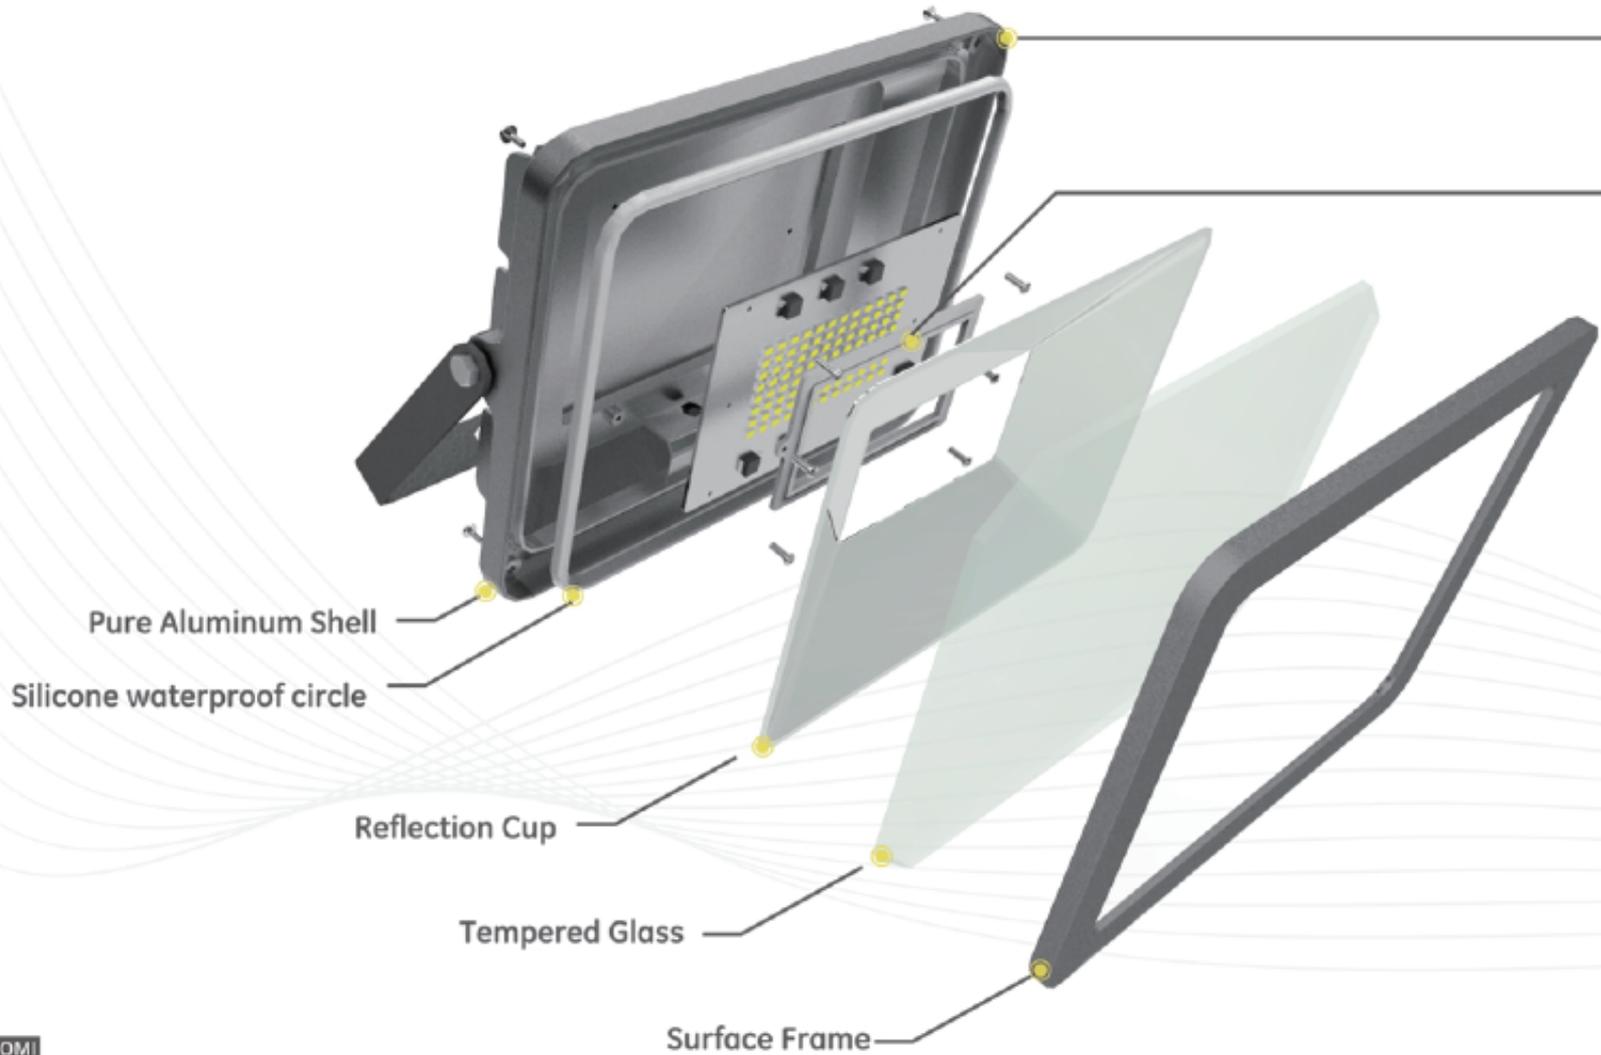

# 5x



33mm



Pure Aluminum Shell

## Main features


Super slim designed with built-in driver

Enlarged light-emitting area guarantee better heat dissipation and visual effects.


Nested design and weep holes in four corners achieve perfect waterproof performance

SMD/COB, 80lm/w

IP66,IK08

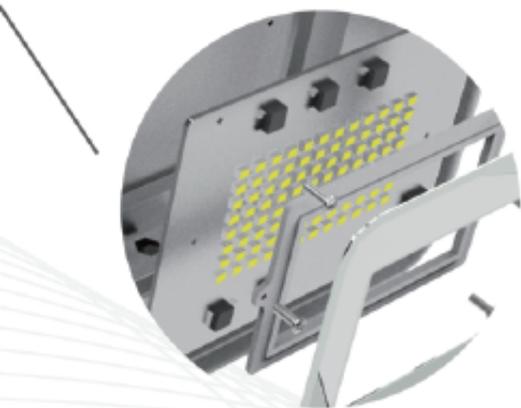

PCB(LED + Integrated Driver)

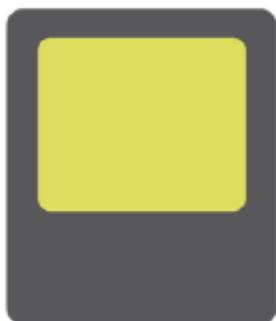

Public model



Private model

## LED Flood Light

LED flood light, IP66, with private housing design, super slim and built-in driver design for a variety of outdoor applications, including facades, landscapes, public places, gardens, bridge, etc. Perfect to replace traditional flood light up to 250W.



## Private Model Floodlight



| MODEL               | POWER | LED TYPE | LUMENS | VOLTAGE    | DIMENSION    |
|---------------------|-------|----------|--------|------------|--------------|
| FL-DC042-10W80C-230 | 10W   | SMD/COB  | 900lm  | AC100-240V | 139x121x39mm |
| FL-DC042-20W80C-230 | 20W   | SMD/COB  | 1800lm | AC100-240V | 193x163x40mm |
| FL-DC042-30W80C-230 | 30W   | SMD/COB  | 2700lm | AC100-240V | 193x163x40mm |
| FL-DC042-50W80C-230 | 50W   | SMD/COB  | 4500lm | AC100-240V | 241x201x42mm |

# Private Model Floodlight



BLACK

WHITE

GREY

| MODEL                | POWER | LED TYPE | LUMENS | DIMENSION    |
|----------------------|-------|----------|--------|--------------|
| FL-DC033-10W80C-230  | 10W   | SMD/COB  | 800lm  | 131x110x33mm |
| FL-DC033-20W80C-230  | 20W   | SMD/COB  | 1600lm | 182x152x36mm |
| FL-DC033-30W80C-230  | 30W   | SMD/COB  | 2400lm | 182x152x36mm |
| FL-DC033-50W80C-230  | 50W   | SMD/COB  | 4000lm | 233x200x40mm |
| FL-DC033-70W80C-230  | 70W   | SMD/COB  | 5600lm | 331x261x62mm |
| FL-DC033-100W80C-230 | 100W  | SMD/COB  | 8000lm | 331x261x62mm |

## Public Model Floodlight



| MODEL               | POWER | LED TYPE | LUMENS | DIMENSION    |
|---------------------|-------|----------|--------|--------------|
| FL-DC013-10W80-230  | 10W   | SMD/COB  | 800lm  | 115x87x35mm  |
| FL-DC013-20W80-230  | 20W   | SMD/COB  | 1600lm | 180x140x43mm |
| FL-DC013-30W80-230  | 30W   | SMD/COB  | 2400lm | 225x180x46mm |
| FL-DC013-50W80-230  | 50W   | SMD/COB  | 4000lm | 283x232x59mm |
| FL-DC013-70W80-230  | 70W   | SMD/COB  | 5600lm | 335x285x65mm |
| FL-DC013-100W80-230 | 100W  | SMD/COB  | 8000lm | 335x285x75mm |

# T-BULB SERIES


## Pure Aluminum Cooler


Pure Aluminum cooling body and PC cover

Sunflower and ventilation hole designed to improve heat dissipation

Anti-glare design

Economic price

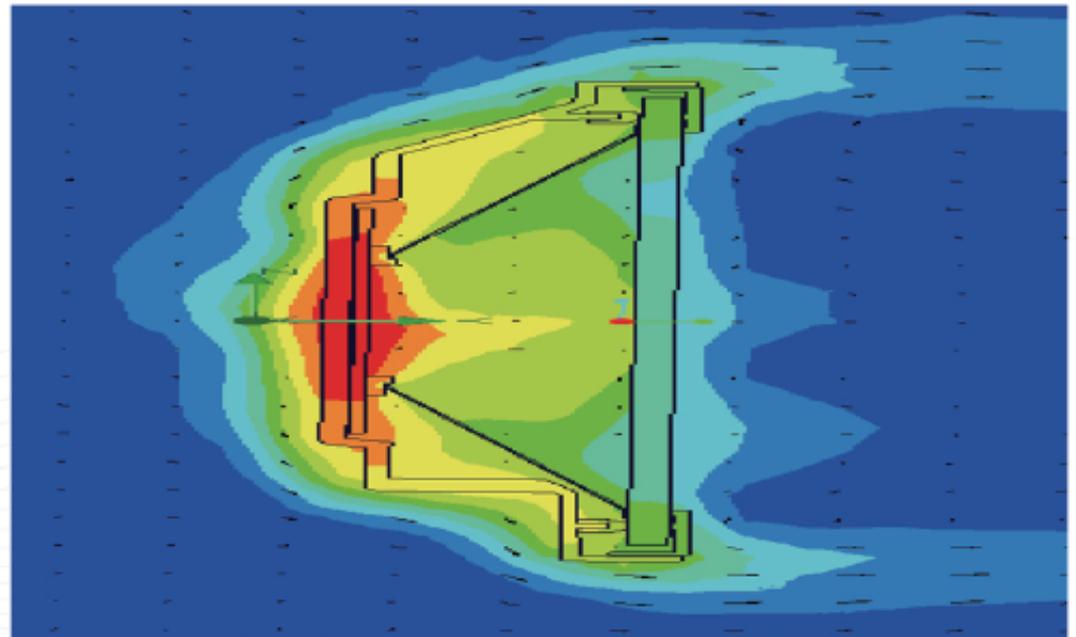

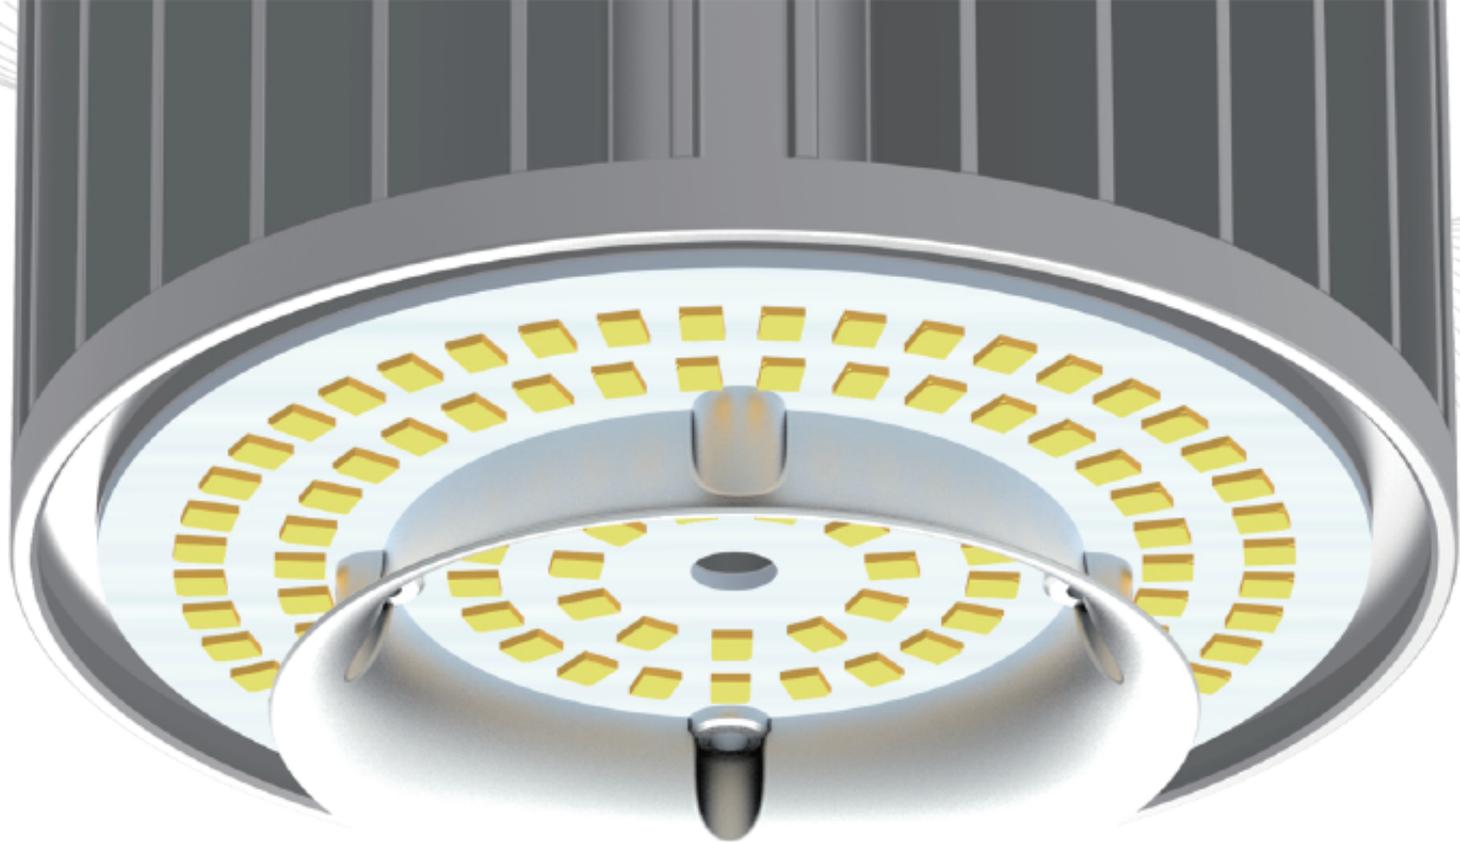

## High power lamp

Available in 20W/30W/40W/60W/80W/100W  
high energy-efficient, 80/100lm/w optional  
E27/E40 lamp base

## LED T-Light

High power T-lights are designed to replace incandescent bulbs 25W-150W, widely used in Hotels, Shopping malls, Stores, Warehouses, Factories, Gyms, Restaurant.





## Thermal Plastic T Light



| MODEL                | POWER | LUMENS | DIMENSION  |
|----------------------|-------|--------|------------|
| T80E27-TP013-20W80C  | 20W   | 1600lm | Φ80x155mm  |
| T100E27-TP013-30W80C | 30W   | 2400lm | Φ100x183mm |
| T120E27-TP013-40W80C | 40W   | 3200lm | Φ120x213mm |



## Aluminum T Light

| MODEL                     | POWER | LUMENS | DIMENSION  |
|---------------------------|-------|--------|------------|
| T80E27-AL013-20W80C-230   | 20W   | 1600lm | Φ80x158mm  |
| T80E27-AL013-30W80C-230   | 30W   | 2400lm | Φ80x183mm  |
| T80E27-AL013-40W80C-230   | 40W   | 3200lm | Φ80x208mm  |
| T100E40-AL013-60W80C-230  | 60W   | 4800lm | Φ100x226mm |
| T100E40-AL013-80W80C-230  | 80W   | 6400lm | Φ100x256mm |
| T120E40-AL013-100W80C-230 | 100W  | 8000lm | Φ120x245mm |



## Die-Casting T Light



| MODEL                  | POWER | LUMENS | DIMENSION  |
|------------------------|-------|--------|------------|
| T80E27-DC012-20W80-230 | 20W   | 1600lm | Φ80x155mm  |
| T80E27-DC012-30W80-230 | 30W   | 2400lm | Φ100x183mm |
| T80E27-DC012-40W80-230 | 40W   | 3200lm | Φ120x213mm |

# THERMAL PLASTIC BULB LIGHT



- Three automatic production lines for LED bulbs and spot lights
- Automatic Capacity: 3.6 secs/pcs LED bulb  
1000 pcs/hour, save around 230 persons,  
1,248,000 pcs/mon
- Better quality
- Shorter lead time
- Save 20% costs





### Main Features

- Replace E27, E14, GU10 and B22 energy saving lamp
- Safe, Environmentally-friendly, and energy saving
- No IR and UV radiation
- Short response time
- Long lifespan 35000hrs




## LED Bulb Light

LED bulb lights are used to replace incandescent bulbs. It is perfect choice for houses, shopping mall, restaurant, hotel, meeting room and advertisement lighting, etc.



# Thermal Plastic LED Bulb

A60

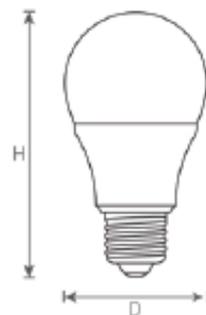

| MODEL | WATTAGE | LUMENS | BEAM ANGLE | SIZE     | CAP BASE |
|-------|---------|--------|------------|----------|----------|
| A60   | 7W      | 560lm  | 230°       | 60x113mm | E27      |
|       | 9W      | 720lm  | 230°       | 60x113mm | E27      |
|       | 11W     | 880lm  | 230°       | 60x113mm | E27      |



# LED Bulb Series



| MODEL | WATTAGE | LUMENS | BEAM ANGLE | SIZE     | CAP BASE |
|-------|---------|--------|------------|----------|----------|
| C37   | 3W      | 240lm  | 160°       | 37x111mm | E27/E14  |
|       | 4W      | 320lm  | 160°       | 37x111mm | E27/E14  |
|       | 5W      | 400lm  | 160°       | 37x111mm | E27/E14  |

| MODEL | WATTAGE | LUMENS | BEAM ANGLE | SIZE    | CAP BASE |
|-------|---------|--------|------------|---------|----------|
| G45   | 3W      | 240lm  | 230°       | 45x82mm | E27      |
|       | 4W      | 320lm  | 230°       | 45x82mm | E27      |
|       | 5W      | 400lm  | 230°       | 45x82mm | E27      |

| MODEL | WATTAGE | LUMENS | BEAM ANGLE | SIZE    | CAP BASE |
|-------|---------|--------|------------|---------|----------|
| A50   | 3W      | 240lm  | 160°       | 50x90mm | E27      |
|       | 5W      | 400lm  | 160°       | 50x90mm | E27      |

| MODEL | WATTAGE | LUMENS | BEAM ANGLE | SIZE     | CAP BASE |
|-------|---------|--------|------------|----------|----------|
| A70   | 12W     | 960lm  | 230°       | 70x134mm | E27      |
|       | 13W     | 1040lm | 230°       | 70x134mm | E27      |

# LED Bulb Series



| MODEL | WATTAGE | LUMENS | BEAM ANGLE | SIZE     | CAP BASE |
|-------|---------|--------|------------|----------|----------|
| A80   | 15W     | 1200lm | 230°       | 80x157mm | E27      |


| MODEL | WATTAGE | LUMENS | BEAM ANGLE | SIZE     | CAP BASE |
|-------|---------|--------|------------|----------|----------|
| A95   | 18W     | 1440lm | 230°       | 95x168mm | E27      |

| MODEL | WATTAGE | LUMENS | BEAM ANGLE | SIZE      | CAP BASE |
|-------|---------|--------|------------|-----------|----------|
| A110  | 22W     | 1760lm | 230°       | 110x202mm | E27      |

| MODEL | WATTAGE | LUMENS | BEAM ANGLE | SIZE     | CAP BASE |
|-------|---------|--------|------------|----------|----------|
| R39   | 5W      | 400lm  | 120°       | 39x67mm  | E14      |
| R50   | 7W      | 560lm  | 120°       | 50x83mm  | E14      |
| R63   | 9W      | 720lm  | 120°       | 63x104mm | E27      |


# Thermal Plastic led Bulb

G95



| MODEL | WATTAGE | LUMENS | BEAM ANGLE | SIZE     | CAP BASE |
|-------|---------|--------|------------|----------|----------|
| G95   | 11W     | 880lm  | 230°       | 95x135mm | E27      |
|       | 15W     | 1200lm | 230°       | 95x135mm | E27      |

G120



| MODEL | WATTAGE | LUMENS | BEAM ANGLE | SIZE      | CAP BASE |
|-------|---------|--------|------------|-----------|----------|
| G120  | 15W     | 1200lm | 230°       | 120x157mm | E27      |
|       | 18W     | 1440lm | 230°       | 120x157mm | E27      |

# Die-Casting Aluminum Bulb Series



| MODEL | WATTAGE | LUMENS | BEAM ANGLE | SIZE     | CAP BASE |
|-------|---------|--------|------------|----------|----------|
| C37   | 4W      | 320lm  | 160°       | 37x111mm | E27/E14  |
|       | 5W      | 400lm  | 160°       | 37x111mm | E27/E14  |
|       | 6W      | 450lm  | 160°       | 37x111mm | E27/E14  |

| MODEL   | WATTAGE | LUMENS | BEAM ANGLE | SIZE    | CAP BASE |
|---------|---------|--------|------------|---------|----------|
| G45/P45 | 4W      | 320lm  | 230°       | 45x82mm | E27/E14  |
|         | 5W      | 400lm  | 230°       | 45x82mm | E27/E14  |
|         | 6W      | 450lm  | 230°       | 45x82mm | E27/E14  |

| MODEL | WATTAGE | LUMENS | BEAM ANGLE | SIZE     | CAP BASE |
|-------|---------|--------|------------|----------|----------|
| A60   | 7W      | 620lm  | 230°       | 60x110mm | E27      |
|       | 9W      | 850lm  | 230°       | 60x110mm | E27      |
|       | 11W     | 1050lm | 230°       | 60x110mm | E27      |

## LED Spotlight


Led spotlights, GU10,MR16,GU5.3 bases available, ideal for replacement of traditional halogen and incandescent spot light in track, display and recessed fixtures, as well as for spotting lighting projects application.



# Thermal-plastic Spotlight



| MODEL | WATTAGE | LUMENS | BEAM ANGLE | LIFESPAN  | SIZE    | BASE      |
|-------|---------|--------|------------|-----------|---------|-----------|
| TP07  | 3W      | 240lm  | 36°/24°    | 30,000hrs | 50x54mm | GU10/MR16 |
|       | 5W      | 400lm  | 36°/24°    | 30,000hrs | 50x54mm | GU10/MR16 |
|       | 6W      | 480lm  | 36°/24°    | 30,000hrs | 50x54mm | GU10/MR16 |

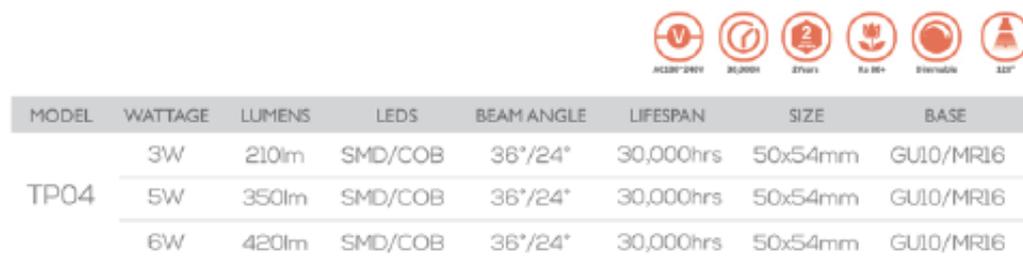

| MODEL | WATTAGE | LUMENS | LEDS    | BEAM ANGLE | LIFESPAN  | SIZE    | BASE      |
|-------|---------|--------|---------|------------|-----------|---------|-----------|
| TP04  | 3W      | 210lm  | SMD/COB | 36°/24°    | 30,000hrs | 50x54mm | GU10/MR16 |
|       | 5W      | 350lm  | SMD/COB | 36°/24°    | 30,000hrs | 50x54mm | GU10/MR16 |
|       | 6W      | 420lm  | SMD/COB | 36°/24°    | 30,000hrs | 50x54mm | GU10/MR16 |



# Thermal-plastic Spotlight



| MODEL | WATTAGE | LUMENS | BEAM ANGLE | LIFESPAN  | SIZE    | BASE      |
|-------|---------|--------|------------|-----------|---------|-----------|
| TP05  | 3W      | 240lm  | 120°       | 30,000hrs | 50x55mm | GU10/MR16 |
|       | 4W      | 320lm  | 120°       | 30,000hrs | 50x55mm | GU10/MR16 |
|       | 5W      | 400lm  | 120°       | 30,000hrs | 50x55mm | GU10/MR16 |
|       | 6W      | 480lm  | 120°       | 30,000hrs | 50x55mm | GU10/MR16 |




| MODEL | WATTAGE | LUMENS | BEAM ANGLE | LIFESPAN  | SIZE    | BASE      |
|-------|---------|--------|------------|-----------|---------|-----------|
| TP06  | 3W      | 240lm  | 120°       | 30,000hrs | 50x62mm | GU10/MR16 |
|       | 4W      | 320lm  | 120°       | 30,000hrs | 50x62mm | GU10/MR16 |
|       | 5W      | 400lm  | 120°       | 30,000hrs | 50x62mm | GU10/MR16 |
|       | 6W      | 480lm  | 120°       | 30,000hrs | 50x62mm | GU10/MR16 |



| MODEL | WATTAGE | LUMENS | BEAM ANGLE | LIFESPAN  | SIZE    | BASE      |
|-------|---------|--------|------------|-----------|---------|-----------|
| TP01  | 3W      | 240lm  | 120°       | 30,000hrs | 50x62mm | GU10/MR16 |
|       | 4W      | 320lm  | 120°       | 30,000hrs | 50x62mm | GU10/MR16 |
|       | 5W      | 400lm  | 120°       | 30,000hrs | 50x62mm | GU10/MR16 |
|       | 6W      | 480lm  | 120°       | 30,000hrs | 50x62mm | GU10/MR16 |



# Module Spotlight

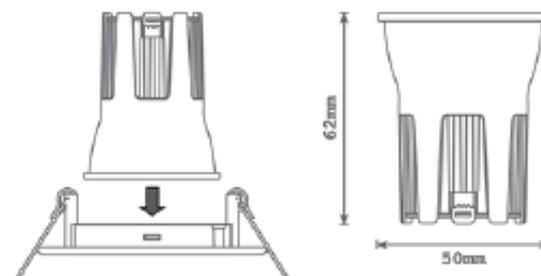

| Model                    | Power | Lumens     | Luminous Intensity | CCT          | Dimension(DxH) |
|--------------------------|-------|------------|--------------------|--------------|----------------|
| MD20-DC012C-10W80COB-230 | 10 W  | 900 LM±10% | 1500 CD±10%        | WW / NW / CW | Φ50X62 mm      |



## LED AR111 Lamp

LED AR111 light is an excellent choice for spotlight application, G53 GU10 base, 12V and 220V available, the best choice for replacement of halogen AR111 on existing fixtures, also widely used for shops, showcases.



## LED AR111 Lamp



30,000H



80%



Ra 80+



40°



Dimmable

| MODEL   | POWER  | LEDS | LUMEN EFFICIENCY | VOLTAGE    | DIMENSION | BASE |
|---------|--------|------|------------------|------------|-----------|------|
| G53SMD  | 12/15W | SMD  | 90lm/w           | AC/DC12V   | Φ111x65mm | G53  |
| G53COB  | 12/15W | COB  | 90lm/w           | AC/DC12V   | Φ111x65mm | G53  |
| GU10SMD | 12/15W | SMD  | 90lm/w           | AC200-240V | Φ111x65mm | GU10 |
| GU10COB | 12/15W | COB  | 90lm/w           | AC200-240V | Φ111x65mm | GU10 |



## LED AR111 Lamp

LED AR111 lights are an excellent choice for spotlight application, G53 base, 12V and 220V available, the best choice for replacement of halogen AR111 on existing fixtures, also widely used for shops, showcases.



## Die-casting Aluminum AR111



30W



Cooling Fan



AC100-240V


50,000H

Fan Cooling

85%

Ra80+

45°

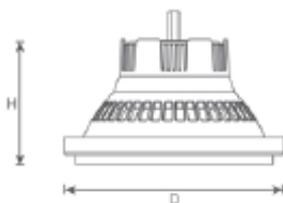

| MODEL                | POWER | LUMENS | LUMINOUS INTENSITY | DIMENSION |
|----------------------|-------|--------|--------------------|-----------|
| AR111-DC30W-211NW-01 | 30W   | 1800lm | 11000 CD           | Φ111x62mm |

## LED Par Light

LED PAR lights are designed to replace traditional incandescent and halogen bulbs. Thanks to their energy-saving quality, LED PAR lights are the smarter solution to light up your room.



## LED Par Light




PAR20 / PAR30 / PAR38



| MODEL                     | POWER | LEDS | LUMENS | DIMENSION  |
|---------------------------|-------|------|--------|------------|
| PAR20-PL012C-7W80COB-230  | 7W    | COB  | 560lm  | Φ63x87mm   |
| PAR30-PL012C-12W80COB-230 | 12W   | COB  | 960lm  | Φ95x121mm  |
| PAR38-PL012C-15W80COB-230 | 15W   | COB  | 1200lm | Φ120x133mm |



| MODEL                  | POWER | LEDS | LUMENS | DIMENSION  |
|------------------------|-------|------|--------|------------|
| PAR30-PL022C-12W90-230 | 12W   | SMD  | 1060lm | Φ95x97mm   |
| PAR38-PL022C-15W90-230 | 15W   | SMD  | 1350lm | Φ121x120mm |



PAR30 / PAR38



PAR30 / PAR38




| MODEL                | POWER | LEDS | LUMENS | DIMENSION  |
|----------------------|-------|------|--------|------------|
| PAR30-AL12W-140NW-02 | 12W   | SMD  | 1100lm | Φ95x120mm  |
| PAR38-AL16W-140NW-02 | 16W   | SMD  | 1450lm | Φ120x132mm |

## LED Ceiling Light

LED ceiling light, recessed with mini sizes, perfect designed for furniture, home decoration, and replace incandescent bulbs up to 75W.



## SMD/COB LED Ceiling Light

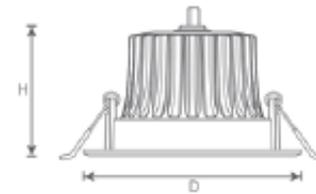

| MODEL                | POWER | LED TYPE | LUMENS | DIMENSION |
|----------------------|-------|----------|--------|-----------|
| CL25-TP012-3W80C-WV  | 3W    | SMD      | 240lm  | Φ90x55mm  |
| CL25-TP012-5W80C-WV  | 5W    | SMD      | 400lm  | Φ90x55mm  |
| CL25-TP012-7W80C-WV  | 7W    | SMD      | 560lm  | Φ90x55mm  |
| CL25-TP012C-3W80C-WV | 3W    | COB      | 210lm  | Φ90x55mm  |
| CL25-TP012C-5W80C-WV | 5W    | COB      | 350lm  | Φ90x55mm  |
| CL25-TP012C-7W80C-WV | 7W    | COB      | 490lm  | Φ90x55mm  |




LED down light, high brightness and easily recessed installation, the most commonly used for malls, airports, offices, lobbies and other commercial applications, idea for replacing down light fixtures with CFL 2x13W, 36W.




## SMD/COB LED Down Light

2.5" / 3.0" / 3.5"

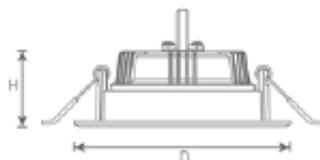

| MODEL               | POWER | LED TYPE | LUMENS | DIMENSION |
|---------------------|-------|----------|--------|-----------|
| DL25-PL04W-110NW-02 | 4W    | COB      | 340lm  | Φ94x39mm  |
| DL30-PL06W-110NW-02 | 6W    | COB      | 500lm  | Φ107x43mm |
| DL35-PL08W-110NW-02 | 8W    | COB      | 680lm  | Φ119x45mm |

2.5" / 3.0" / 3.5"

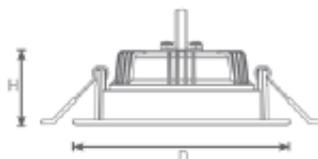


| MODEL               | POWER | LED TYPE | LUMENS | DIMENSION |
|---------------------|-------|----------|--------|-----------|
| DL25-PL04W-120NW-01 | 4W    | SMD      | 360lm  | Φ94x39mm  |
| DL30-PL06W-120NW-01 | 6W    | SMD      | 500lm  | Φ107x42mm |
| DL35-PL08W-120NW-01 | 8W    | SMD      | 715lm  | Φ119x45mm |




# SMD LED Down Light

2.5" / 3.0" / 3.5"

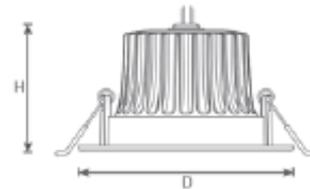



3.5" 8W [WW - 100°]

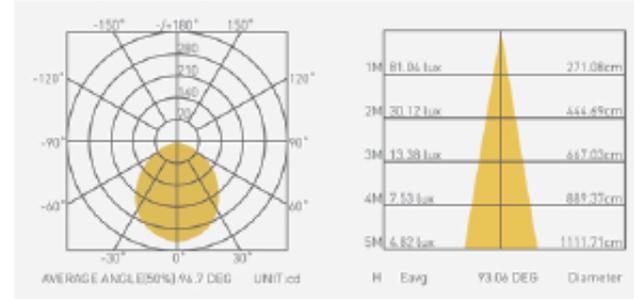

| MODEL               | POWER | LED TYPE | LUMENS | VOLTAGE    | DRIVER             | DIMENSION |
|---------------------|-------|----------|--------|------------|--------------------|-----------|
| DL25-PL04W-220NW-01 | 4W    | SMD      | 330lm  | AC100-240V | External IC Driver | Φ94x59mm  |
| DL30-PL06W-220NW-01 | 6W    | SMD      | 550lm  | AC100-240V | External IC Driver | Φ107x64mm |
| DL35-PL08W-220NW-01 | 8W    | SMD      | 880lm  | AC100-240V | External IC Driver | Φ119x71mm |

**SMD****LED Down Light**

4.0" / 6.0" / 8.0"

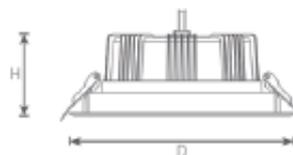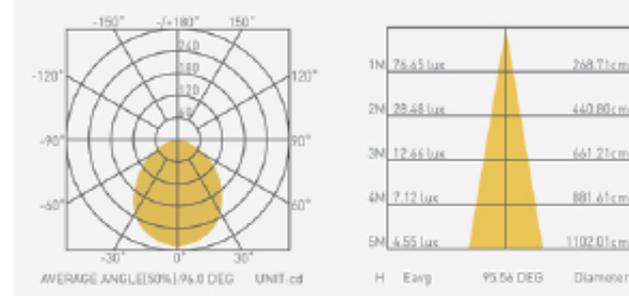**3.5" 8W [WW - 100°]**

| MODEL               | POWER | LED TYPE | LUMENS | VOLTAGE    | DRIVER             | DIMENSION  |
|---------------------|-------|----------|--------|------------|--------------------|------------|
| DL40-TP12W-110NW-01 | 12W   | SMD      | 1100lm | AC100-240V | External IC Driver | Φ130x60mm  |
| DL60-TP18W-110NW-01 | 18W   | SMD      | 1775lm | AC100-240V | External IC Driver | Φ190x73mm  |
| DL80-TP24W-110NW-01 | 24W   | SMD      | 2520lm | AC100-240V | External IC Driver | Φ 230x88mm |

# USA Market

For North American market, Homi developed many series light for commercial light, such as surface mounted led panel light, led downlight, led tube light and led panel light etc.....All of them is UL/ETL/DLC/ Energy star certificate.



## Super Slim Min Panel Light



### Features:

Super slim thermal plastic round panel-13mm

Available in different color

5'/7'/9'/12'

Built-in driver

CE/UL qualified

IP 65




13mm



| MODEL                 | POWER | LED TYPE | LUMENS | VOLTAGE    | DIMMING | DIMENSION |
|-----------------------|-------|----------|--------|------------|---------|-----------|
| PR135M-PL023CKF-6W80  | 6W    | SMD      | 360lm  | AC100-130V | Triac   | Φ135x13mm |
| PR180M-PL023CKF-12W80 | 12W   | SMD      | 780lm  | AC100-130V | Triac   | Φ180x13mm |
| PR225M-PL023CKF-18W80 | 18W   | SMD      | 1170lm | AC100-130V | Triac   | Φ225x13mm |
| PR300M-PL023CKF-24W80 | 24W   | SMD      | 1560lm | AC100-130V | Triac   | Φ300x13mm |

# LED Downlight

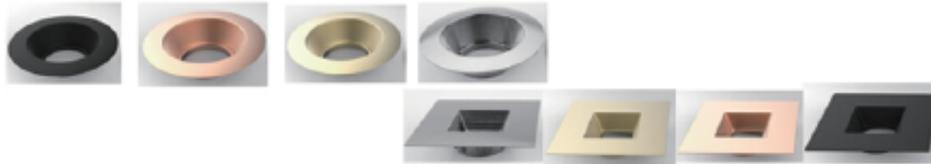

## Features :

Twist lock, trim interchangeable.

A deeply regressed diffusing lens provides uniform aperture luminance.

Dimmable to 5% with most Lutron and Leviton wall box dimmers.

Five different trim color: White, Black, Golden, Bronze, Chrome.



| MODEL                 | POWER | LED TYPE | LUMENS | VOLTAGE    | DIMMING | DIMENSION  |
|-----------------------|-------|----------|--------|------------|---------|------------|
| HMDL21-9CS10-S290-XX  | 9W    | SMD      | 650lm  | AC100-130V | Triac   | Φ128x83mm  |
| HMDL21-12CS13-S292-XX | 12W   | SMD      | 850lm  | AC100-130V | Triac   | Φ191x100mm |
| HMDL21-15CS16-S294-XX | 15W   | SMD      | 1050lm | AC100-130V | Triac   | Φ191x100mm |
| HMDL21-18CS19-S296-XX | 18W   | SMD      | 1200lm | AC100-130V | Triac   | Φ191x100mm |

# LED T8 Tube Light



## Features:

All models UL/DLC approved


LEDs with LM80 report

High Luminous efficiency **>130lm/w**

Full range input: AC100-277V

Compatible with 95% electronic ballast in North American market.

Type A+B

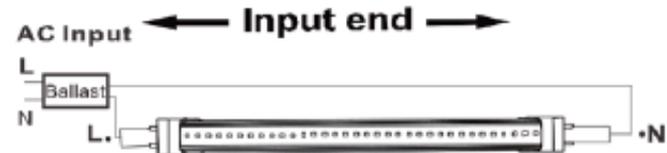

| MODEL                | POWER | LED TYPE | LUMENS | VOLTAGE    | DIMMING     | PACKING           |
|----------------------|-------|----------|--------|------------|-------------|-------------------|
| HMFL-T8-10W600 BISS  | 10W   | SMD2835  | 1300lm | AC100-277V | Triac/0-10V | 65x22x25cm/30pcs  |
| HMFL-T8-13W900 BISS  | 13W   | SMD2835  | 1690lm | AC100-277V | Triac/0-10V | 95x22x25cm/30pcs  |
| HMFL-T8-18W1200 BISS | 18W   | SMD2835  | 2340lm | AC100-277V | Triac/0-10V | 126x22x25cm/30pcs |
| HMFL-T8-30W1500 BISS | 30W   | SMD2835  | 3900lm | AC100-277V | Triac/0-10V | 156x22x25cm/30pcs |
| HMFL-T8-30W1800 BISS | 30W   | SMD2835  | 3900lm | AC100-277V | Triac/0-10V | 186x22x25cm/20pcs |
| HMFL-T8-40W2400 BISS | 40W   | SMD2835  | 5200lm | AC100-277V | Triac/0-10V | 246x22x25cm/10pcs |

# LED BR/PAR Light



## BR20 / BR30 / BR40



| MODEL               | POWER | LED TYPE | LUMENS | VOLTAGE    | DIMENSION  |
|---------------------|-------|----------|--------|------------|------------|
| BR20-TP07W-123NW-01 | 7W    | SMD      | 600lm  | AC100-130V | Φ63x104mm  |
| BR30-TP12W-123NF-01 | 12W   | SMD      | 1450lm | AC100-130V | Φ95x135mm  |
| BR40-TP18W-123NF-01 | 18W   | SMD      | 1950lm | AC100-130V | Φ124x158mm |

## PAR30 / PAR38




| MODEL                | POWER | LED TYPE | LUMENS | VOLTAGE    | DIMENSION  |
|----------------------|-------|----------|--------|------------|------------|
| PAR30-TP12W-223NF-01 | 12W   | SMD      | 960lm  | AC100-130V | Φ95x97mm   |
| PAR38-TP16W-223NF-01 | 16W   | SMD      | 1200lm | AC100-130V | Φ121x120mm |

## PAR20 / PAR30 / PAR38



| MODEL                | POWER | LED TYPE | LUMENS | VOLTAGE    | DIMENSION  |
|----------------------|-------|----------|--------|------------|------------|
| PAR20-PL07W-113NW-01 | 7W    | COB      | 560lm  | AC100-130V | Φ63x87mm   |
| PAR30-PL12W-123NF-01 | 12W   | COB      | 960lm  | AC100-130V | Φ95x121mm  |
| PAR38-PL16W-123NF-01 | 18W   | COB      | 1200lm | AC100-130V | Φ120x133mm |

## LED Panel Light

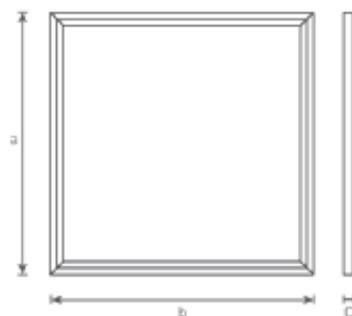

### Features:

- All models UL/DLC approved
- High Luminous efficiency >130lm/w
- High uniformity > 90%
- Advanced optical design, UGR<19



AC100-277V



50,000H



Dimmable



Ra 80+



UGR<19



PF>0.9


| MODEL               | POWER | LUMENS   | LED TYPE | CCT          | DIMENSION(A×B×C) |
|---------------------|-------|----------|----------|--------------|------------------|
| HMET-22-30WD-ZZZ-YY | 30 W  | 3900 lm  | SMD2835  | WW / NW / CW | 604x604x12 mm    |
| HMET-22-36WD-ZZZ-YY | 36 W  | 4680 lm  | SMD2835  | WW / NW / CW | 604x604x12 mm    |
| HMET-22-40WD-ZZZ-YY | 40 W  | 5200 lm  | SMD2835  | WW / NW / CW | 604x604x12 mm    |
| HMET-22-46WD-ZZZ-YY | 46 W  | 5980 lm  | SMD2835  | WW / NW / CW | 604x604x12 mm    |
| HMET-14-36WD-ZZZ-YY | 36 W  | 4680 lm  | SMD2835  | WW / NW / CW | 300x1214x12 mm   |
| HMET-14-46WD-ZZZ-YY | 46 W  | 5980 lm  | SMD2835  | WW / NW / CW | 300x1214x12 mm   |
| HMET-24-52WD-ZZZ-YY | 52 W  | 6760 lm  | SMD2835  | WW / NW / CW | 604x1214x12 mm   |
| HMET-24-60WD-ZZZ-YY | 60 W  | 7800 lm  | SMD2835  | WW / NW / CW | 604x1214x12 mm   |
| HMET-24-70WD-ZZZ-YY | 70 W  | 9100 lm  | SMD2835  | WW / NW / CW | 604x1214x12 mm   |
| HMET-24-78WD-ZZZ-YY | 78 W  | 10140 lm | SMD2835  | WW / NW / CW | 604x1214x12 mm   |

# SHENZHEN HOMI LIGHTING CO., LTD

2-5F, Building No.3, Hongfa Jiateli High-Tech.Park, Shiyao Street, Bao'an District, Shenzhen City, China.  
Tel:+86 (0)75536615577 Fax:+86(0)755-28135010 Email:info@homiled.com Web: www.homiled.com



2016V2

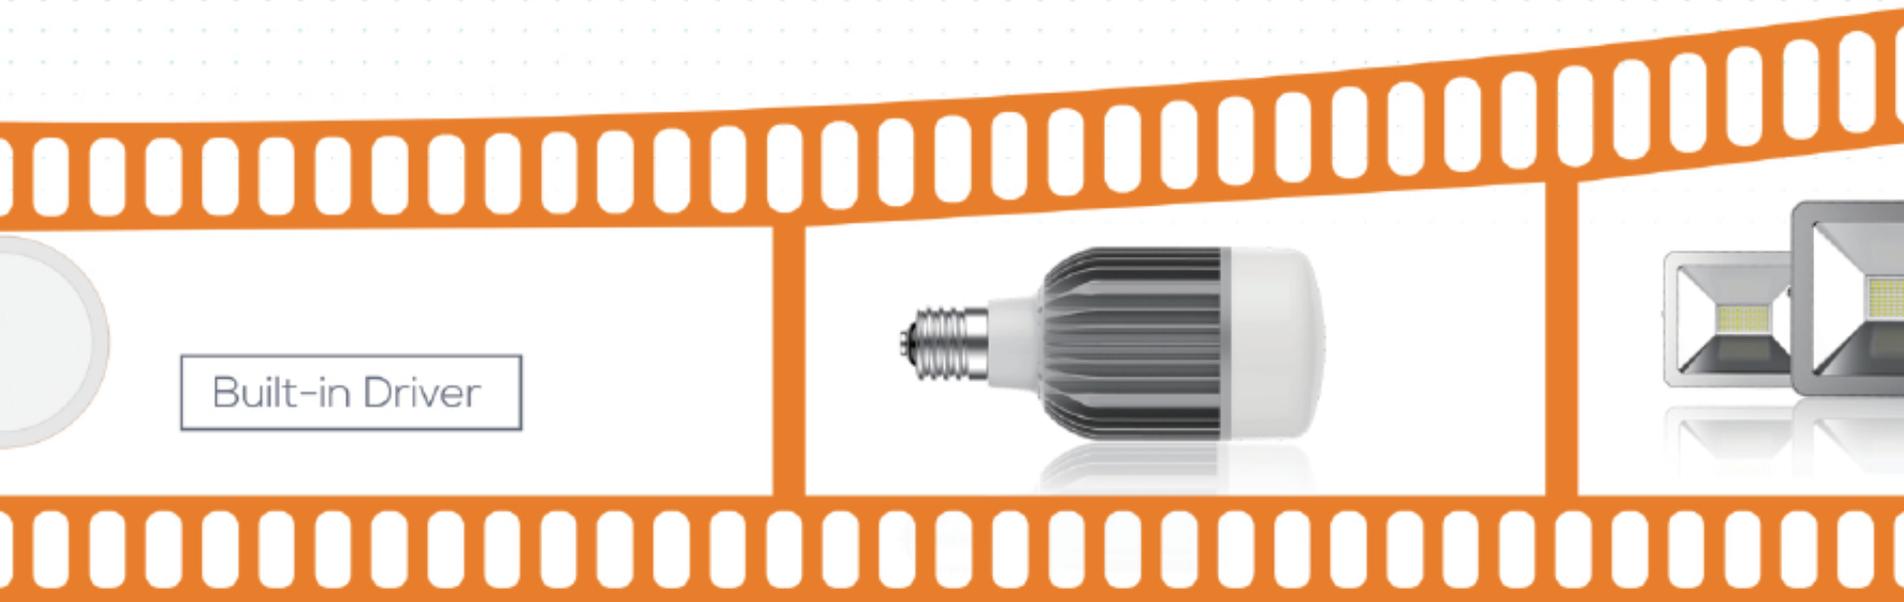

Built-in Driver

PANEL LIGHT

T-LIGHT

FLOOD